

12

# EUROPEAN PATENT APPLICATION

21 Application number: 87309527.7

51 Int. Cl. 4: G 06 K 11/00

22 Date of filing: 28.10.87

30 Priority: 29.10.86 US 924248

43 Date of publication of application:  
04.05.88 Bulletin 88/18

84 Designated Contracting States: DE FR GB

71 Applicant: Hewlett-Packard Company  
3000 Hanover Street  
Palo Alto California 94304 (US)

72 Inventor: Clements, Brad  
1737 Sagewood Drive  
Fort Collins, Co 80525 (US)

Keith, John C.  
5809 Mossycup Court  
Loveland, Co 80537 (US)

74 Representative: Williams, John Francis et al  
J.F. Williams & Co 34 Tavistock Street  
London WC2E 7PB (GB)

## 54 Digitizer stylus.

57 A handheld stylus (1) for a digitizer includes a tip (4) that is angled downward to meet the digitizing surface at almost, but not quite, a right angle. The body of the stylus is of a generally triangular cross section. Mounted upon the stylus are pushbutton switches (3) actuable by a force along a line essentially at right angles to the digitizing surface when the stylus is in use. An anti-rolling winged member (5,7) keeps the stylus from rolling when it is laid over one of its tops after use.

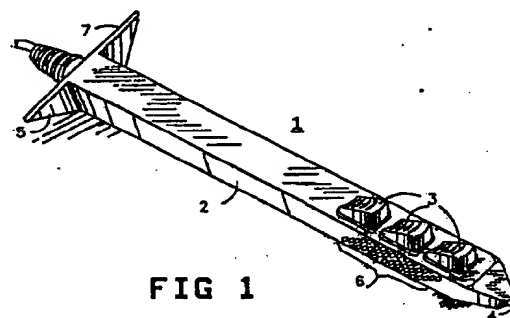


FIG 1

EP 0 266 189 A2

BEST AVAILABLE COPY

**Description****DIGITIZER STYLUS****Background and Summary of the Invention**

It is common for a digitizing tablet to operate in conjunction with a handheld stylus. It is also known for handheld wand-like or stylus-like tools to include switches to control or activate some process involving the tool. Certain problems arise in a digitizing application, however, when pushbutton switches are included on a stylus. First, pressing a switch on the stylus can cause an unwanted movement of the tip of the stylus. It would be desirable if the geometry of the stylus and its switches were arranged to minimize the tendency of the point to move during the application of force to actuate the switches. Next, if the shape of the stylus allows the hand to grip the stylus in different rotational positions relative to the switches from one use to the next, it can be difficult to always activate the switches with a motion that does not disturb the stylus position. It would be desirable if the cross-sectional shape of the stylus served both to orient the stylus in the hand for the optimum application of force to the switches as well as to provide a comfortable fit between the fingers. And finally, it would be desirable if the stylus incorporated means to lay the stylus down and then pick it up again with easy quick motions and yet have it be correctly oriented in the hand.

The tendency of the point of the stylus to move may be minimized by noting the angle at which the body of the stylus is most often held while in use, and then angling the tip of the stylus relative to the body so that the tip is nearly, but not quite, perpendicular to the platen, or digitizing surface. Accordingly the invention proposes a digitizer stylus comprising an elongate body having a sensor tip projecting at one end, characterised in that the body is of generally triangular cross section extending along a longitudinal axis and is formed of a top surface and two adjacent nonparallel sides converging along the underside of the body at a first acute angle, and the tip is inclined away from the longitudinal axis, in a first direction toward the line of intersection of the sides, by a second acute angle.

If there are pushbutton switches, further improvement is achieved by angling the caps of the pushbutton switches on the stylus to allow the switches to be actuated with a generally downward motion toward the platen, and by arranging that the line of action for the pushbutton switches be such that a force applied by an actuating finger forces the stylus against the platen substantially along the axis of the tip.

The tendency of the stylus to rotate in the hand from one use to the next may be reduced by imparting a substantially triangular cross section to the body of the stylus. Lastly, by noting that most users lay the stylus down by simply bending their wrist and releasing their grip, resulting in the stylus laying upside down and pointing towards the hand, a pair of legs or a winged member attached to the

stylus body at the end opposite the tip will keep the stylus from rolling and in the position it was in when released. It is then a very easy task to simply reverse the motions of the hand to retrieve the stylus in one quick movement.

**Brief Description of the Drawings**

Figure 1 is a perspective view of a handheld digitizing stylus incorporating an angled tip, angled caps for pushbutton switches, a generally triangular cross section, and a wing member to prevent rolling.

Figure 2 is an end elevational view of the digitizing stylus of Figure 1.

Figure 3 is a side elevational view of the digitizing stylus Figure 1.

**Description of a Preferred Embodiment**

Refer now to Figure 1, where is shown a perspective view of a handheld digitizing stylus 1. The body 2 of the stylus 1 is of a generally triangular shape, as may be seen by a brief examination of Figure 2. Similar to gripping a pencil, the body 2 of the stylus 1 is gripped between the thumb and middle finger of one hand, in the vicinity of a knurled region 6. The forefinger descends from above and rests on one of the pushbutton switches 3. A tip 4 serves as the electrical centre of the sensing mechanism used in the digitizing process. The tip 4 is angled down approximately twenty degrees relative to the body 2, so that it is near to being perpendicular to the platen when the stylus 1 is being held in the hand. Finally, note the wing member 5 at the end of the stylus 2 opposite the tip 4. It has a long top edge 7 that keeps the stylus 1 from rolling or tilting when the stylus 1 is laid face down on its top. In such a position the stylus 1 rests upon the long edge 7 of the wing member 5 and on the raised edges of the pushbutton keys 3.

Referring now to Figure 2, the triangular cross section of the body 2 may be more clearly seen. As shown in the figure, the opposite sides gripped by the thumb and second finger would, if extended, meet with an angle of twenty-six degrees.

Referring again to Figure 3, the tops of the pushbutton switches 3 are angled up from the longitudinal axis 10 by fifteen degrees. They are each hinged at the end that slopes back into the body 2, as shown by reference numeral 9. In this way a force applied along arrow 8 both actuates the pushbutton and forces the tip 4 against the platen. The latter effect arises as follows. In use, the body 2 is cradled in the hand of the user by the intersection of the thumb and forefinger at point 11. When force is applied by a fingertip along the line of arrow 8 the body 2 attempts to pivot about point 11 in the direction of arrow 12. This urges the tip 4 against the platen. When the stylus body 2 is held in the hand for use, line of force 8 is nearly perpendicular to the platen and arises with a natural downward motion of the finger. This results in a minimum of disturbance

to the position of the tip 4 when one of the pushbuttons 3 is activated.

A further advantage follows from the angled tip 4. When the stylus 1 is released by laying it over onto its top the tip 4 points up away from the digitizing surface, and is further away from that surface than it would be if it extended straight out along the longitudinal axis. This extra distance of perhaps one quarter to three eights of an inch substantially decreases the electrical coupling between the tip 4 and the digitizing surface. It is relatively easy to arrange that such low coupling result in a "no signal" condition and then ignore any pushbutton switches that are activated during the no signal condition. In this way, a pushbutton switch activated by pressure applied accidentally to the upside-down stylus will have no effect.

#### Claims


1. A digitizer stylus comprising an elongate body (2) having a sensor tip (4) projecting at one end, characterised in that the body (2) is of generally triangular cross section extending along a longitudinal axis and is formed of a top surface and two adjacent nonparallel sides converging along the underside of the body at a first acute angle, and the tip (4) is inclined away from the longitudinal axis, in a first direction toward the line of intersection of the sides, by a second acute angle.

2. A digitizer stylus as claimed in claim 1, characterised in that switch means (3) are disposed upon the top surface towards said one end and have an actuating surface for receiving a force to activate the switch means, the actuating surface being inclined away from the top surface in a second direction, opposite to the first, by a third acute angle, and are hinged to the top surface in the vicinity of where the inclined actuating surface intersects the top surface.

3. A digitizer as claimed in claim 1 or 2, characterised in that a winged member (5,7) is located at the end of the body opposite the tip, extending in a plane transverse to the longitudinal axis and having an upper edge substantially in the plane of the top surface and extending laterally thereof.

4. A digitizer stylus as claimed in any preceding claim characterised in that the second acute angle is such that when the stylus is handheld like a pen, the tip (4) is disposed in a plane substantially normal to the surface on which the hand rests.

0266189

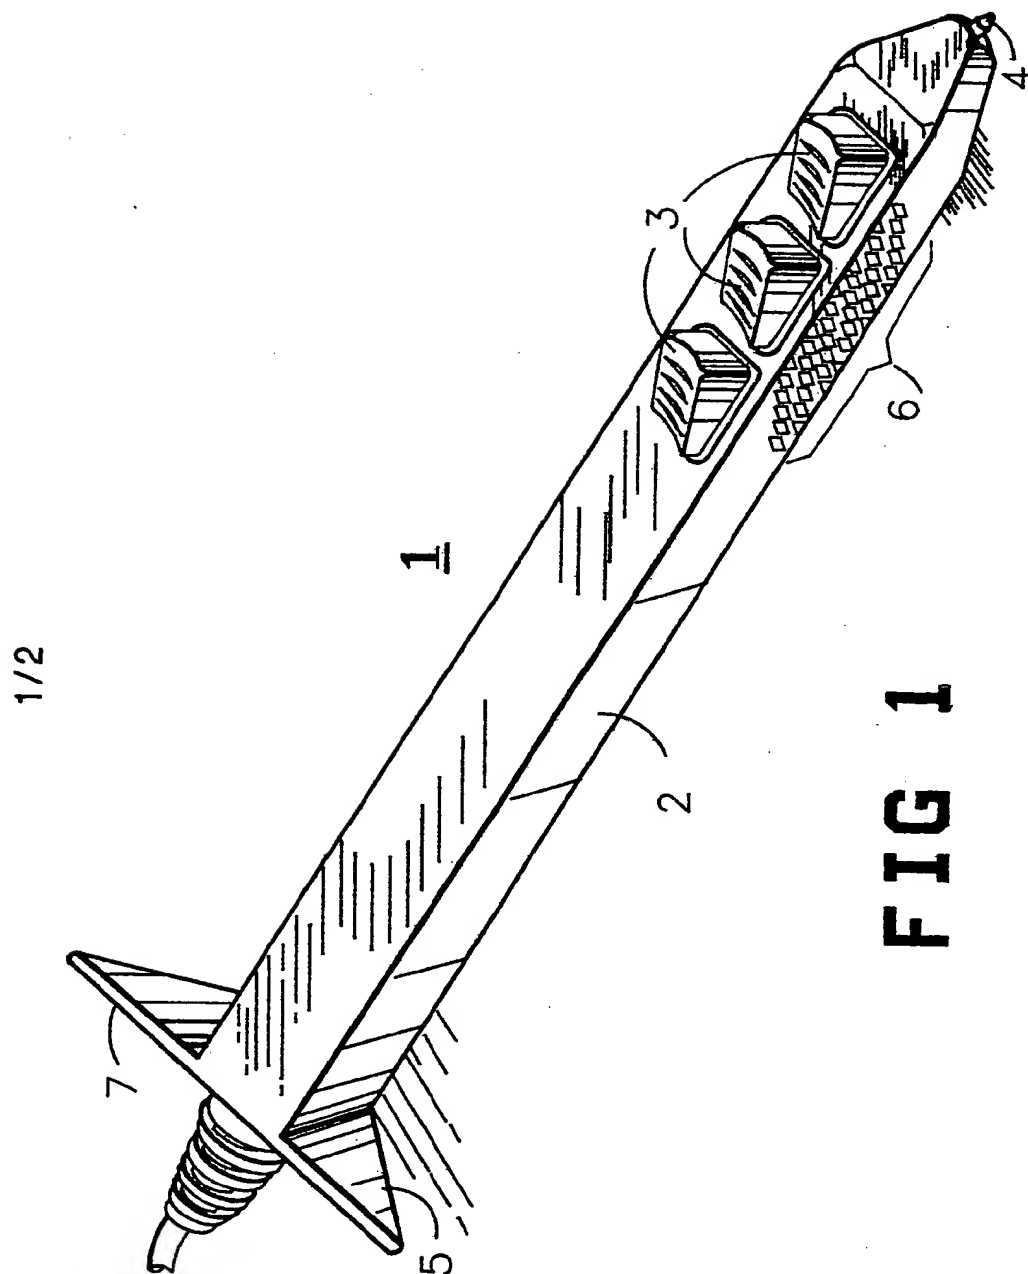

2/2

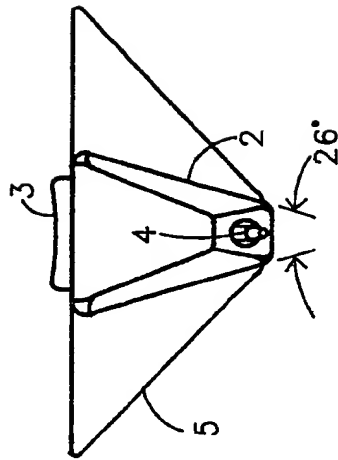


FIG 2

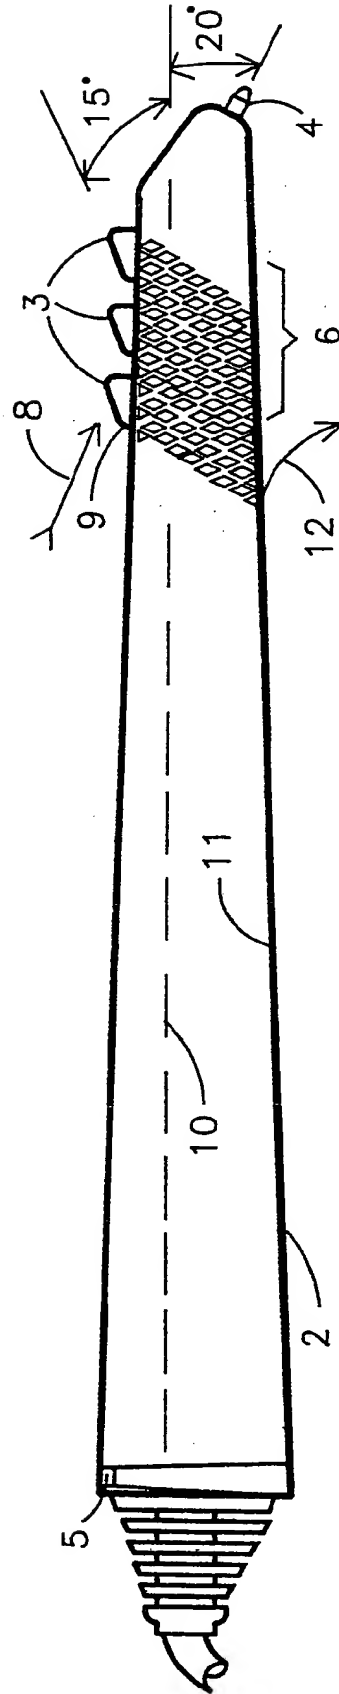


FIG 3

12 EUROPEAN PATENT APPLICATION

21 Application number: 87309527.7

51 Int. Cl.<sup>5</sup>: G06K 11/00

22 Date of filing: 28.10.87

30 Priority: 29.10.86 US 924248

43 Date of publication of application:  
04.05.88 Bulletin 88/18

84 Designated Contracting States:  
DE FR GB

68 Date of deferred publication of the search report:  
14.03.90 Bulletin 90/11

71 Applicant: Hewlett-Packard Company  
3000 Hanover Street  
Palo Alto California 94304(US)

72 Inventor: Clements, Brad  
1737 Sagewood Drive  
Fort Collins, Co 80525(US)  
Inventor: Keith, John C.  
5809 Mossycup Court  
Loveland, Co 80537(US)

74 Representative: Williams, John Francis et al  
J.F. Williams & Co 34 Tavistock Street  
London WC2E 7PB(GB)

54 Digitizer stylus.

57 A handheld stylus (1) for a digitizer includes a tip (4) that is angled downward to meet the digitizing surface at almost, but not quite, a right angle. The body of the stylus is of a generally triangular cross section. Mounted upon the stylus are pushbutton switches (3) actuable by a force along a line essentially at right angles to the digitizing surface when the stylus is in use. An anti-rolling winged member (5,7) keeps the stylus from rolling when it is laid over one of its tops after use.

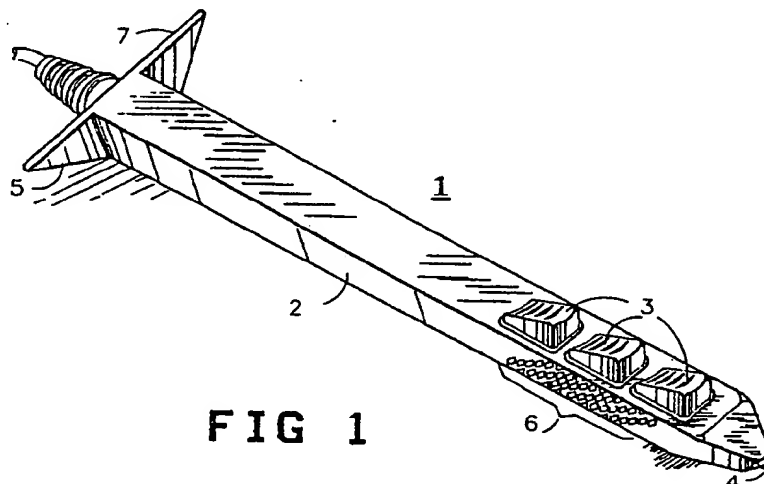


FIG 1

Xerox Copy Centre

EP 0 266 189 A3



EP 87 30 9527

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
Y	US-A-4 495 646 (N. GHARACHORLOO) * column 4, lines 26-37; column 5, lines 5-7; figure 1 *	1,4	G 06 K 7/10 G 06 K 9/22 G 06 K 11/00
A	---	2	
Y	US-A-3 182 291 (E.G. NASSIMBENE) * column 2, lines 9-18; figures 1,2 *	1,4	
A	---	3	
A	DE-A-3 043 898 (STANDARD ELEKTRIK LORENZ) * figure *	1,4	
A	US-A-3 462 548 (R.M. RINDER) * column 2, lines 46-55; column 3, lines 13-36; figure 1 *	1,2,4	
			TECHNICAL FIELDS SEARCHED (Int. Cl. 4)
			G 06 K 7/00 G 06 K 9/00
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 15-11-1989	Examiner DUCREAU F B
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P0401)

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**